



STATIONARY WORKHOLDING



*The Essential choice
for S-axis machining*





Applicazioni/Benefici cliente

- Bloccaggio **solo** auto-centrante altamente preciso con la massima ripetibilità
- Design compatto per una migliore accessibilità e aperture di uscita trucioli molto ampie
- Ideale per OP 10 e OP 20

Caratteristiche tecniche


- Bloccaggio auto-centrante
 - Forza di bloccaggio fino a 15 kN (80 Nm)
 - Larghezza ganasce 84 mm
 - Interfaccia per sistemi di bloccaggio Zero Point APS / TDM e Plus5 52/96
- Chiave di manovra

Applications / Customer Benefits



- Highly precise **only** self-centering clamping with maximum repeatability
- Compact design for improved accessibility and very wide chip evacuation openings
- Ideal for OP 10 and OP 20

Technical features



- Self-centering clamping
 - Clamping force up to 15 kN (80 Nm)
 - Jaw width 84 mm
 - Interface for Zero Point system APS / TDM and Plus5 52/96
- Wrench

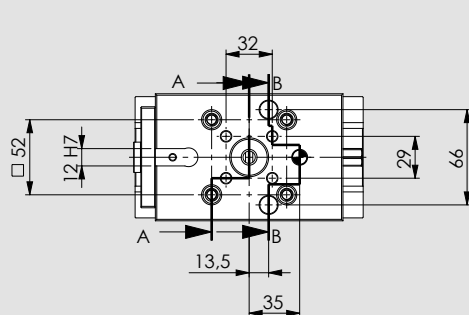



SEZIONE A-A
SECTION A-A

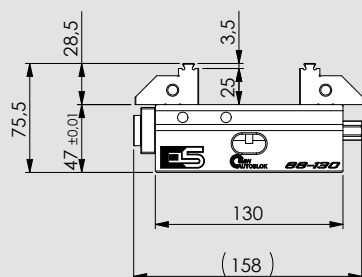

SEZIONE B-B
SECTION B-B

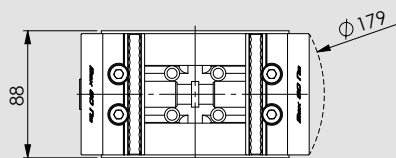

Soggetto a modifiche tecniche
Subject to technical changes



* Apertura con ganasce lisce
* Opening with smooth jaws

Soggetto a modifiche tecniche
Subject to technical changes

Codice - Id. No.

77583352

Peso - Weight (Kg)

4,5



Applicazioni/Benefici cliente

- Bloccaggio **solo** auto-centrante altamente preciso con la massima ripetibilità
- Design compatto per una migliore accessibilità e aperture di uscita trucioli molto ampie
- Ideale per OP 10 e OP 20

Caratteristiche tecniche

- Bloccaggio auto-centrante
- Forza di bloccaggio fino a 25 kN (130 Nm)
- Larghezza ganasce 124 mm
- Interfaccia per sistemi di bloccaggio Zero Point APS, TDM e Plus5 52/96

Chiave di manovra


Applications / Customer Benefits

- Highly precise **only** self-centering clamping with maximum repeatability
- Compact design for improved accessibility and very wide chip evacuation openings.
- Ideal for OP 10 and OP 20


Technical features

- Self-centering clamping
- Clamping force up to 25 kN (130 Nm)
- Jaw width 124 mm
- Interface for Zero Point system APS, TDM and Plus5 52/96

Wrench

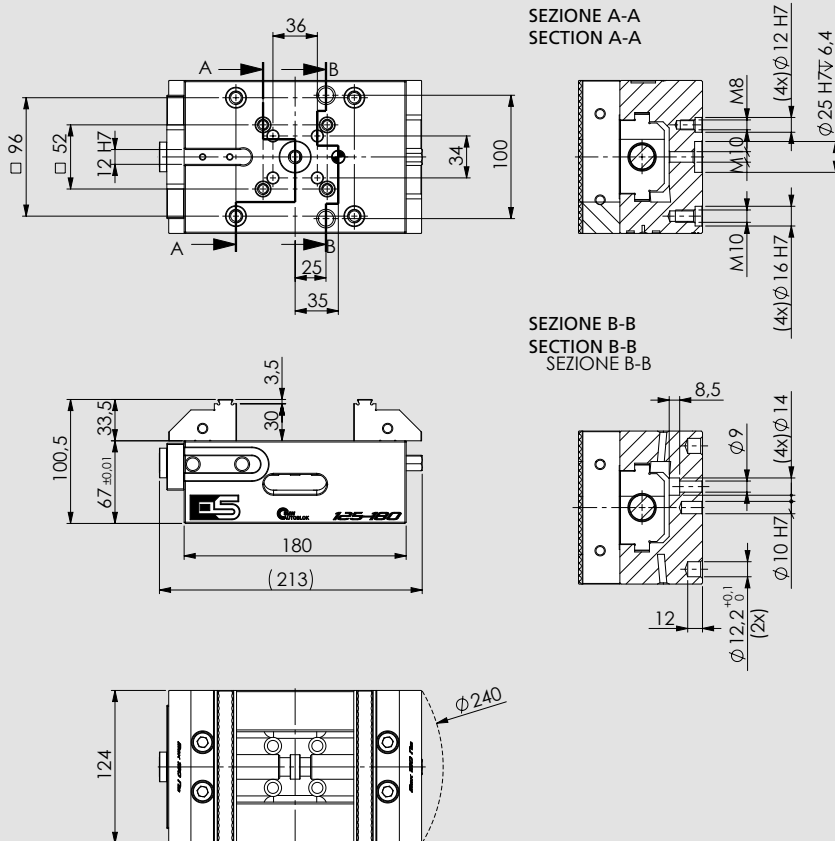

Soggetto a modifiche tecniche
Subject to technical changes

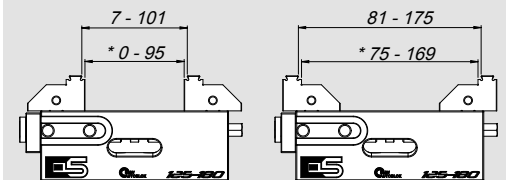

- * Apertura con ganasce lisce
- * Opening with smooth jaws

Soggetto a modifiche tecniche
Subject to technical changes

Codice - Id. No.

77583362

Peso - Weight (Kg)

12,5



SINTERGRIP




APS



PLUS 5



TDM



FMS



TC



MC



CLAK SYSTEM



IMG



V5



GENIUS



CIVI SINTERGRIP



CAM SYSTEM



HOLDING CLAMPS



VARI CLAMP



TWIN VISE



JAWS



FAST CLAMPS



TOUCHDEX



A COMPANY OF THE GROUP



OFFICINA MECCANICA LOMBARDA S.r.l.

Viale dell'Industria 6 - 27020 Trivolzio (PV) ITALY
Tel. +39 0382 93 00 00

E-mail ► omlspa@omlspa.it
Web ► www.omlspa.it